

## LM741 Operational Amplifier


### General Description

The LM741 series are general purpose operational amplifiers which feature improved performance over industry standards like the LM709. They are direct, plug-in replacements for the 709C, LM201, MC1439 and 748 in most applications. The amplifiers offer many features which make their application nearly foolproof: overload protection on the input and


output, no latch-up when the common mode range is exceeded, as well as freedom from oscillations.

The LM741C/LM741E are identical to the LM741/LM741A except that the LM741C/LM741E have their performance guaranteed over a 0°C to +70°C temperature range, instead of -55°C to +125°C.

### Schematic Diagram

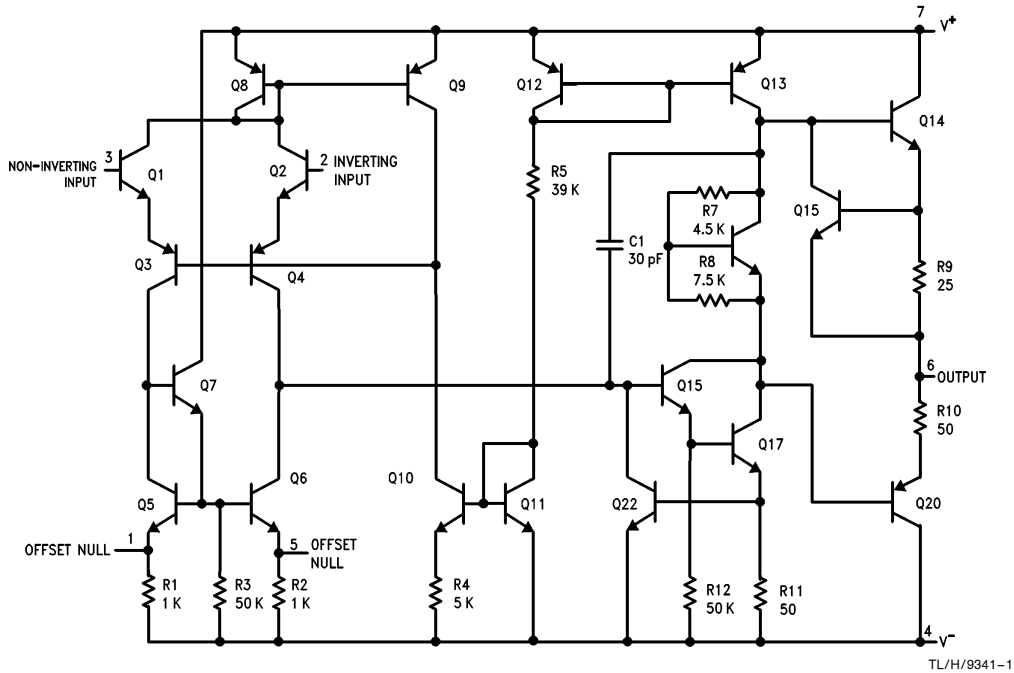

Offset Nulling Circuit



## Absolute Maximum Ratings

If Military/Aerospace specified devices are required, please contact the National Semiconductor Sales Office/Distributors for availability and specifications.  
(Note 5)

|   | LM741A          | LM741E          | LM741           | LM741C          |
|---|-----------------|-----------------|-----------------|-----------------|
| Supply Voltage  | ±22V            | ±22V            | ±22V            | ±18V            |
| Power Dissipation (Note 1)  | 500 mW          | 500 mW          | 500 mW          | 500 mW          |
| Differential Input Voltage  | ±30V            | ±30V            | ±30V            | ±30V            |
| Input Voltage (Note 2)  | ±15V            | ±15V            | ±15V            | ±15V            |
| Output Short Circuit Duration   | Continuous      | Continuous      | Continuous      | Continuous      |
| Operating Temperature Range   | −55°C to +125°C | 0°C to +70°C    | −55°C to +125°C | 0°C to +70°C    |
| Storage Temperature Range   | −65°C to +150°C | −65°C to +150°C | −65°C to +150°C | −65°C to +150°C |
| Junction Temperature  | 150°C           | 100°C           | 150°C           | 100°C           |
| Soldering Information   |                 |                 |                 |                 |
| N-Package (10 seconds)  | 260°C           | 260°C           | 260°C           | 260°C           |
| J- or H-Package (10 seconds)  | 300°C           | 300°C           | 300°C           | 300°C           |
| M-Package   |                 |                 |                 |                 |
| Vapor Phase (60 seconds)  | 215°C           | 215°C           | 215°C           | 215°C           |
| Infrared (15 seconds)   | 215°C           | 215°C           | 215°C           | 215°C           |
| See AN-450 "Surface Mounting Methods and Their Effect on Product Reliability" for other methods of soldering surface mount devices. |                 |                 |                 |                 |
| ESD Tolerance (Note 6)  | 400V            | 400V            | 400V            | 400V            |

## Electrical Characteristics (Note 3)

| Parameter                             | Conditions   | LM741A/LM741E |     |       | LM741 |     |     | LM741C |     |     | Units                        |
|---------------------------------------|--|---------------|-----|-------|-------|-----|-----|--------|-----|-----|------------------------------|
|                                       |  | Min           | Typ | Max   | Min   | Typ | Max | Min    | Typ | Max |                              |
| Input Offset Voltage                  | $T_A = 25^\circ\text{C}$<br>$R_S \leq 10\text{ k}\Omega$<br>$R_S \leq 50\Omega$  |               | 0.8 | 3.0   |       | 1.0 | 5.0 |        | 2.0 | 6.0 | mV<br>mV                     |
|                                       | $T_{AMIN} \leq T_A \leq T_{AMAX}$<br>$R_S \leq 50\Omega$<br>$R_S \leq 10\text{ k}\Omega$   |               |     | 4.0   |       |     | 6.0 |        |     | 7.5 | mV<br>mV                     |
| Average Input Offset Voltage Drift    |  |               |     | 15    |       |     |     |        |     |     | $\mu\text{V}/^\circ\text{C}$ |
| Input Offset Voltage Adjustment Range | $T_A = 25^\circ\text{C}$ , $V_S = \pm 20\text{V}$  | ±10           |     |       |       | ±15 |     |        | ±15 |     | mV                           |
| Input Offset Current                  | $T_A = 25^\circ\text{C}$   |               | 3.0 | 30    |       | 20  | 200 |        | 20  | 200 | nA                           |
|                                       | $T_{AMIN} \leq T_A \leq T_{AMAX}$  |               |     | 70    |       | 85  | 500 |        |     | 300 | nA                           |
| Average Input Offset Current Drift    |  |               |     | 0.5   |       |     |     |        |     |     | nA/ $^\circ\text{C}$         |
| Input Bias Current                    | $T_A = 25^\circ\text{C}$   |               | 30  | 80    |       | 80  | 500 |        | 80  | 500 | nA                           |
|                                       | $T_{AMIN} \leq T_A \leq T_{AMAX}$  |               |     | 0.210 |       |     | 1.5 |        |     | 0.8 | $\mu\text{A}$                |
| Input Resistance                      | $T_A = 25^\circ\text{C}$ , $V_S = \pm 20\text{V}$  | 1.0           | 6.0 |       | 0.3   | 2.0 |     | 0.3    | 2.0 |     | M $\Omega$                   |
|                                       | $T_{AMIN} \leq T_A \leq T_{AMAX}$ ,<br>$V_S = \pm 20\text{V}$  | 0.5           |     |       |       |     |     |        |     |     | M $\Omega$                   |
| Input Voltage Range                   | $T_A = 25^\circ\text{C}$   |               |     |       |       |     |     | ±12    | ±13 |     | V                            |
|                                       | $T_{AMIN} \leq T_A \leq T_{AMAX}$  |               |     |       | ±12   | ±13 |     |        |     |     | V                            |
| Large Signal Voltage Gain             | $T_A = 25^\circ\text{C}$ , $R_L \geq 2\text{ k}\Omega$<br>$V_S = \pm 20\text{V}$ , $V_O = \pm 15\text{V}$<br>$V_S = \pm 15\text{V}$ , $V_O = \pm 10\text{V}$               | 50            |     |       | 50    | 200 |     | 20     | 200 |     | V/mV<br>V/mV                 |
|                                       | $T_{AMIN} \leq T_A \leq T_{AMAX}$ ,<br>$R_L \geq 2\text{ k}\Omega$ ,<br>$V_S = \pm 20\text{V}$ , $V_O = \pm 15\text{V}$<br>$V_S = \pm 15\text{V}$ , $V_O = \pm 10\text{V}$ | 32            |     |       |       |     |     |        |     |     | V/mV<br>V/mV                 |
|                                       | $V_S = \pm 5\text{V}$ , $V_O = \pm 2\text{V}$  | 10            |     |       | 25    |     |     | 15     |     |     | V/mV<br>V/mV                 |

## Electrical Characteristics (Note 3) (Continued)

| Parameter                                    | Conditions  | LM741A/LM741E        |             |            | LM741                |                      |           | LM741C               |                      |     | Units              |
|--|---|----------------------|-------------|------------|----------------------|----------------------|-----------|----------------------|----------------------|-----|--------------------|
|  |   | Min                  | Typ         | Max        | Min                  | Typ                  | Max       | Min                  | Typ                  | Max |                    |
| Output Voltage Swing                         | $V_S = \pm 20V$<br>$R_L \geq 10\text{ k}\Omega$<br>$R_L \geq 2\text{ k}\Omega$  | $\pm 16$<br>$\pm 15$ |             |            |                      |                      |           |                      |                      |     | V<br>V             |
|  | $V_S = \pm 15V$<br>$R_L \geq 10\text{ k}\Omega$<br>$R_L \geq 2\text{ k}\Omega$  |                      |             |            | $\pm 12$<br>$\pm 10$ | $\pm 14$<br>$\pm 13$ |           | $\pm 12$<br>$\pm 10$ | $\pm 14$<br>$\pm 13$ |     | V<br>V             |
| Output Short Circuit Current                 | $T_A = 25^\circ\text{C}$<br>$T_{AMIN} \leq T_A \leq T_{AMAX}$   | 10<br>10             | 25          | 35<br>40   |                      | 25                   |           |                      | 25                   |     | mA<br>mA           |
| Common-Mode Rejection Ratio                  | $T_{AMIN} \leq T_A \leq T_{AMAX}$<br>$R_S \leq 10\text{ k}\Omega, V_{CM} = \pm 12V$<br>$R_S \leq 50\Omega, V_{CM} = \pm 12V$    | 80                   | 95          |            | 70                   | 90                   |           | 70                   | 90                   |     | dB<br>dB           |
| Supply Voltage Rejection Ratio               | $T_{AMIN} \leq T_A \leq T_{AMAX}$ ,<br>$V_S = \pm 20V$ to $V_S = \pm 5V$<br>$R_S \leq 50\Omega$<br>$R_S \leq 10\text{ k}\Omega$ | 86                   | 96          |            | 77                   | 96                   |           | 77                   | 96                   |     | dB<br>dB           |
| Transient Response<br>Rise Time<br>Overshoot | $T_A = 25^\circ\text{C}$ , Unity Gain   |                      | 0.25<br>6.0 | 0.8<br>20  |                      | 0.3<br>5             |           |                      | 0.3<br>5             |     | $\mu\text{s}$<br>% |
| Bandwidth (Note 4)                           | $T_A = 25^\circ\text{C}$  | 0.437                | 1.5         |            |                      |                      |           |                      |                      |     | MHz                |
| Slew Rate                                    | $T_A = 25^\circ\text{C}$ , Unity Gain   | 0.3                  | 0.7         |            |                      | 0.5                  |           |                      | 0.5                  |     | V/ $\mu\text{s}$   |
| Supply Current                               | $T_A = 25^\circ\text{C}$  |                      |             |            |                      | 1.7                  | 2.8       |                      | 1.7                  | 2.8 | mA                 |
| Power Consumption                            | $T_A = 25^\circ\text{C}$<br>$V_S = \pm 20V$<br>$V_S = \pm 15V$  |                      | 80          | 150        |                      | 50                   | 85        |                      | 50                   | 85  | mW<br>mW           |
| LM741A                                       | $V_S = \pm 20V$<br>$T_A = T_{AMIN}$<br>$T_A = T_{AMAX}$   |                      |             | 165<br>135 |                      |                      |           |                      |                      |     | mW<br>mW           |
| LM741E                                       | $V_S = \pm 20V$<br>$T_A = T_{AMIN}$<br>$T_A = T_{AMAX}$   |                      |             | 150<br>150 |                      |                      |           |                      |                      |     | mW<br>mW           |
| LM741  | $V_S = \pm 15V$<br>$T_A = T_{AMIN}$<br>$T_A = T_{AMAX}$   |                      |             |            |                      | 60<br>45             | 100<br>75 |                      |                      |     | mW<br>mW           |

**Note 1:** For operation at elevated temperatures, these devices must be derated based on thermal resistance, and  $T_J$  max. (listed under "Absolute Maximum Ratings").  $T_J = T_A + (\theta_{JA} P_D)$ .

| Thermal Resistance                  | Cerdip (J) | DIP (N) | HO8 (H) | SO-8 (M) |
|-------------------------------------|------------|---------|---------|----------|
| $\theta_{JA}$ (Junction to Ambient) | 100°C/W    | 100°C/W | 170°C/W | 195°C/W  |
| $\theta_{JC}$ (Junction to Case)    | N/A        | N/A     | 25°C/W  | N/A      |

**Note 2:** For supply voltages less than  $\pm 15V$ , the absolute maximum input voltage is equal to the supply voltage.

**Note 3:** Unless otherwise specified, these specifications apply for  $V_S = \pm 15V$ ,  $-55^\circ\text{C} \leq T_A \leq +125^\circ\text{C}$  (LM741/LM741A). For the LM741C/LM741E, these specifications are limited to  $0^\circ\text{C} \leq T_A \leq +70^\circ\text{C}$ .


**Note 4:** Calculated value from: BW (MHz) = 0.35/Rise Time( $\mu\text{s}$ ).

**Note 5:** For military specifications see RETS741X for LM741 and RETS741AX for LM741A.

**Note 6:** Human body model, 1.5 k $\Omega$  in series with 100 pF.

## Connection Diagrams


**Metal Can Package**

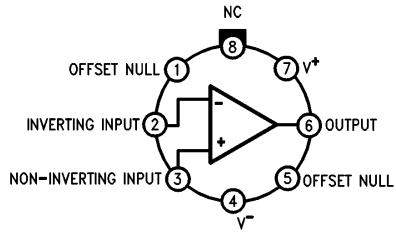

TL/H/9341-2

**Order Number LM741H, LM741H/883\*,  
LM741AH/883 or LM741CH  
See NS Package Number H08C**

**Ceramic Dual-In-Line Package**

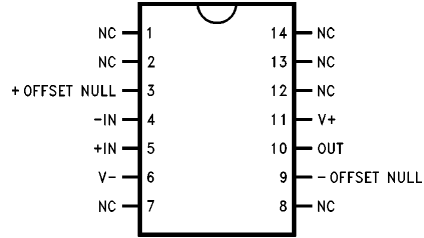


TL/H/9341-5

**Order Number LM741J-14/883\*, LM741AJ-14/883\*\*  
See NS Package Number J14A**

\*also available per JM38510/10101

\*\*also available per JM38510/10102


**Dual-In-Line or S.O. Package**

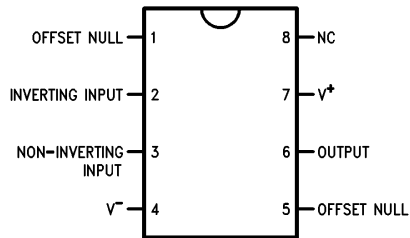

TL/H/9341-3

**Order Number LM741J, LM741J/883,  
LM741CM, LM741CN or LM741EN  
See NS Package Number J08A, M08A or N08E**

**Ceramic Flatpak**


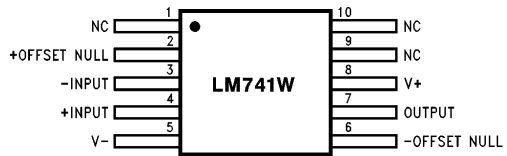


TL/H/9341-6

**Order Number LM741W/883  
See NS Package Number W10A**

\*LM741H is available per JM38510/10101


**Physical Dimensions** inches (millimeters)

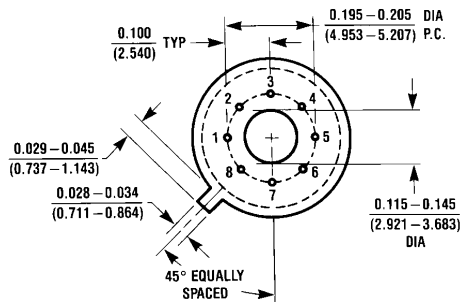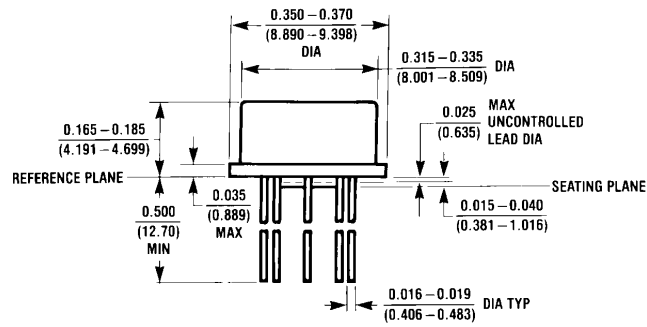

H08C (REV E)


**Metal Can Package (H)**  
**Order Number LM741H, LM741H/883, LM741AH/883, LM741CH or LM741EH**  
**NS Package Number H08C**

**Physical Dimensions** inches (millimeters) (Continued)

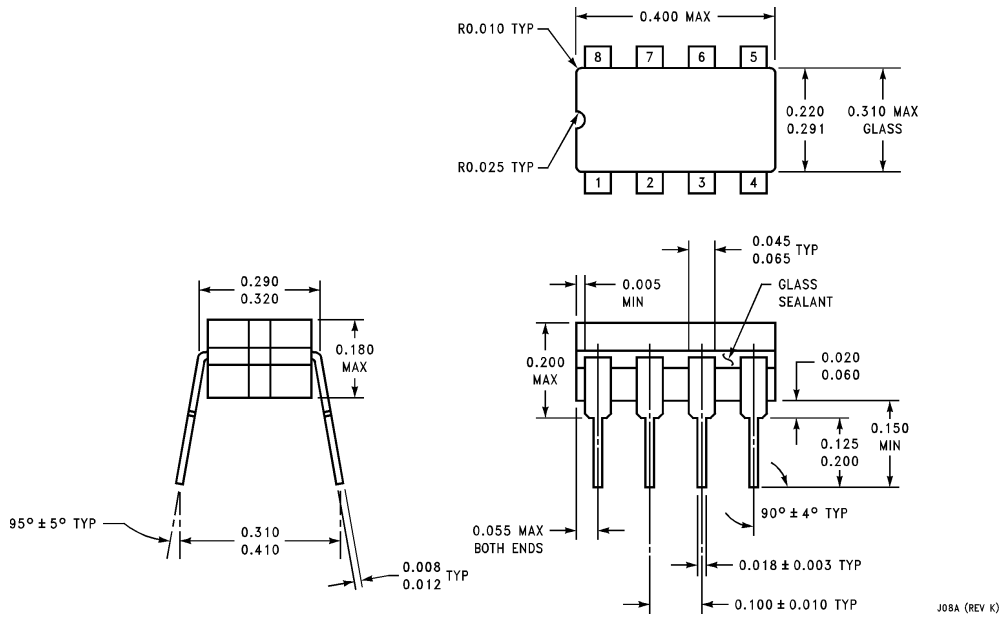

J08A (REV K)

**Ceramic Dual-In-Line Package (J)**  
**Order Number LM741CJ or LM741J/883**  
**NS Package Number J08A**

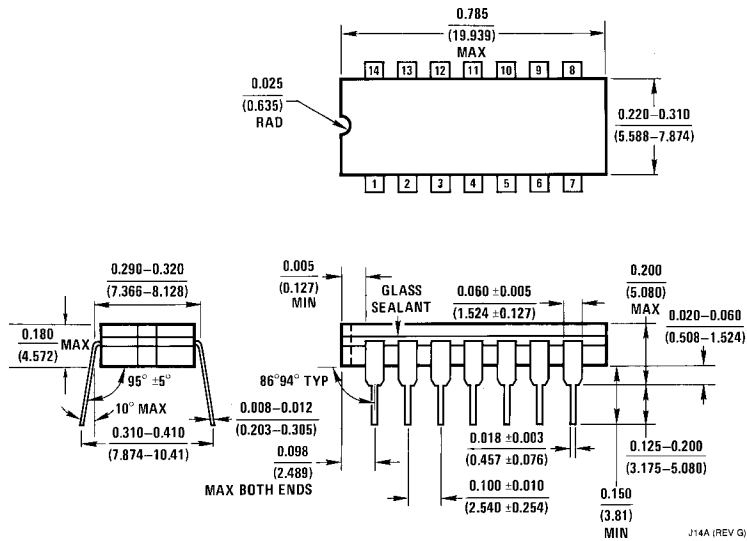


J14A (REV G)

**Ceramic Dual-In-Line Package (J)**  
**Order Number LM741J-14/883 or LM741AJ-14/883**  
**NS Package Number J14A**



**Physical Dimensions** inches (millimeters) (Continued)

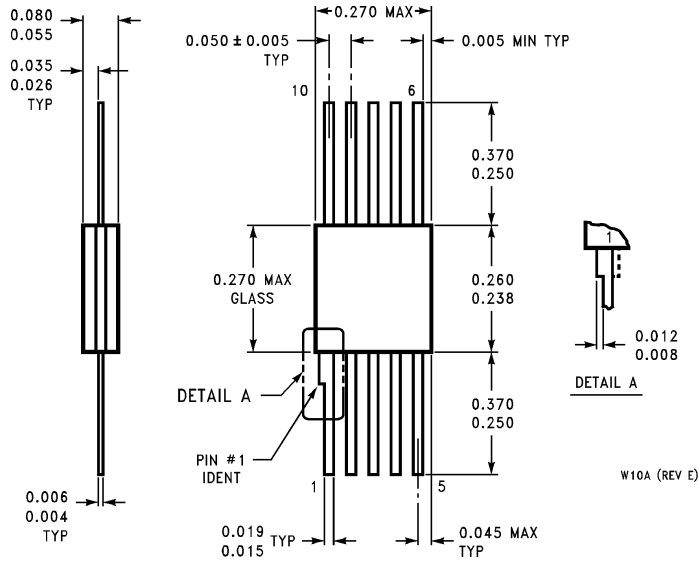

**10-Lead Ceramic Flatpak (W)**  
**Order Number LM741W/883**  
**NS Package Number W10A**

W10A (REV E)

**LIFE SUPPORT POLICY**

NATIONAL'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF NATIONAL SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and whose failure to perform, when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury to the user.
2. A critical component is any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.



**National Semiconductor Corporation**  
 1111 West Bardin Road  
 Arlington, TX 76017  
 Tel: 1(800) 272-9959  
 Fax: 1(800) 737-7018

**National Semiconductor Europe**  
 Fax: (+49) 0-180-530 85 86  
 Email: cnjwge@tevm2.nsc.com  
 Deutsch Tel: (+49) 0-180-530 85 85  
 English Tel: (+49) 0-180-532 78 32  
 Français Tel: (+49) 0-180-532 93 58  
 Italiano Tel: (+49) 0-180-534 16 80

**National Semiconductor Hong Kong Ltd.**  
 19th Floor, Straight Block,  
 Ocean Centre, 5 Canton Rd.  
 Tsimshatsui, Kowloon  
 Hong Kong  
 Tel: (852) 2737-1600  
 Fax: (852) 2736-9960

**National Semiconductor Japan Ltd.**  
 Tel: 81-043-299-2309  
 Fax: 81-043-299-2408

National does not assume any responsibility for use of any circuitry described, no circuit patent licenses are implied and National reserves the right at any time without notice to change said circuitry and specifications.